



输出功率: 约0.5~8.0W
贵金属电刷马达/碳刷马达

典型应用: 视听设备
精密仪器
家用电器




OUTPUT: APPROX 0.5~8.0W
Precious Metal-brush Motors/Carbon-brush Motors

Typical Applications: Audiovisual Equipment
Precision Instrument
Household Appliances


1. OUTLINE DRAWING:

UNIT:MM

DIRECTION OF ROTATION

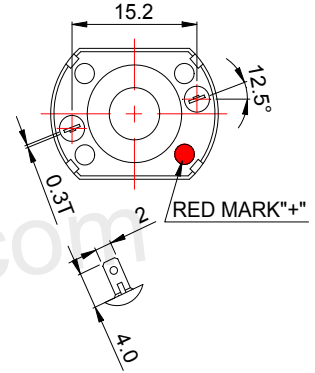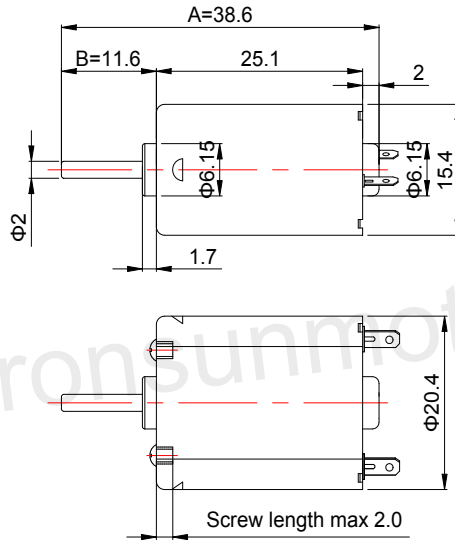

View:



Customizable Parameters:

1. Length A and B
2. Electric Performance
3. Direction of Rotation
4. Eccentric Wheel is available

WEIGHT: 24g(Approx)

2. MOTOR PERFORMANCE :

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL V	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN.m	OUTPUT W	TORQUE g.cm	TORQUE mN.m	CURRENT A
FF-130PH-18130	3.0~7.0	6.0	13500	0.082	11500	0.48	13	1.28	1.53	92	9.03	2.83
FK-130SH-15180	3.0~6.0	4.8	7100	0.065	5685	0.26	15.5	1.52	0.90	78	7.65	1.05
FF-130SH-11340	4.5~10.0	9.0	7000	0.035	5619	0.15	15.4	1.51	0.89	80	7.85	0.61

